




**DESIGN FEATURES:**

- Manufacturing Std. : BS 5351
- Testing & Inspection Std. : API 598 / BS 6755
- Face to Face & End to End : ASME B16.10 / API 6D
- End Flange Dimension : ASME B16.5
- Pressure Rating : ASME B16.34
- Operation : Manual & Actuator
- Class : #150, #300, #600, #900, & #1500
- Size Range : 40mm to 500mm

**TYPE LBLC - 150**

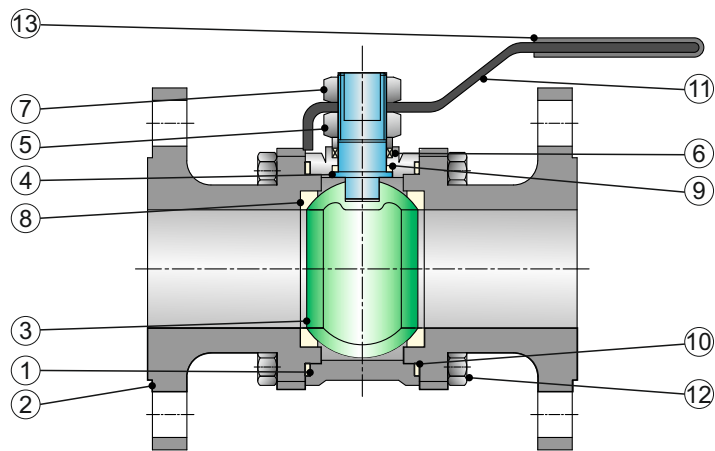

**MATERIALS OF CONSTRUCTION**

Part No.	Description	Material	Qty.
1	Body	ASTM A216 Gr. WCB, A351 CF8/CF8M	01
2	Body Adapter	ASTM A216 Gr. WCB, A351 CF8/CF8M	02
3	Ball	AISI 304 / 316 / 304L / 316L, SS202	01
4	Stem	AISI 304 / 316 / 304L / 316L, SS202	01
5	Gland Nut	MS, SS202, SS304, SS316	01
6	Gland Bush	MS, SS202, SS304, SS316	01
7	Lock Nut	MS, SS202, SS304, SS316	01
8	Seat Ring	PTFE / Graphite / GFT	02
9	Stem Packing	PTFE / Graphite / GFT	01
10	Body Packing	PTFE / Graphite / GFT	02
11	Lever	MS, SS202, SS304, SS316	01
12	Stud & Nut	ASTM A193 Gr. B7 & ASTM A194 Gr. 2H	Req.
13	Sleeve	PVC	01

**NOTE:**

Due to continuous development higher class and sizes will be available upon request